

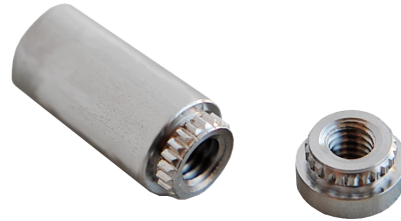


J Fastener/Press fit Nut


- Press-into Board Nut, with high fixed torque
- Small size




How to use

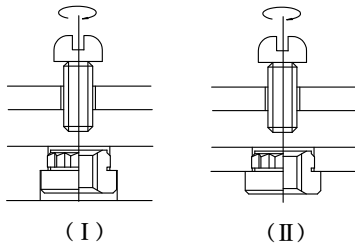

PC board dia.



How to mount



P/N	Material	φA	φB	T	M Screw thread	φa ±0.02	φb ±0.03	Tightening torque
BFP-M1. 2-1. 5	Phosphor Bronze	3. 0	3. 5	1. 0	M1. 2x0. 25P	2. 75	3. 1	-
BFB-M2-1. 5-S	Brass	3. 5	4. 5	1. 5	M2x0. 4P	CA11 factory	4. 6	
BFS-M2-1. 5	SUS	3. 0	4. 0	1. 5	M2. x0. 4P	2. 75	4. 1	29. 4N/3kgf cm max (in case of Epoxy laminate board/UL approved)
BFS-M2. 6-1. 5		4. 55	5. 5	1. 5	M2. 6x0. 45P	4. 2	5. 6	
BFS-M3-1. 65				1. 65	M3x0. 5P			
BFS-M3-3. 0				3. 0				
BFS-M3-10. 0		10. 0	M4x0. 7P	6. 4	8. 6			
BFS-M4-4. 0	6. 68	8. 5				4. 0		