



## N Series Socket Pins


Contact Resistance: less than 15mΩ  
 Acceptable Plug Range: φ 0.30~φ 0.52  
 Material Sleeve: Brass Gold over Ni plated, or Tin over Ni plated  
 Contact: Beryllium Copper, Gold over Ni plated



**NSF18-GG**




**NSF20-GG**




Acceptable Plug: φ 0.40max

**NSF19-GG**




Acceptable Plug: φ 0.40max


**RN0013-GG**

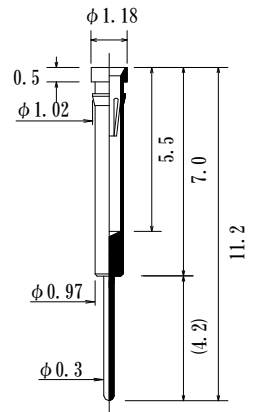


**NA10-GG**

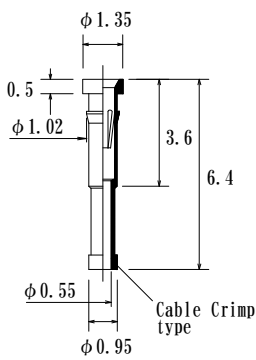


**NLPS064-GG**  
 適合電線  
 AWG#28~#30

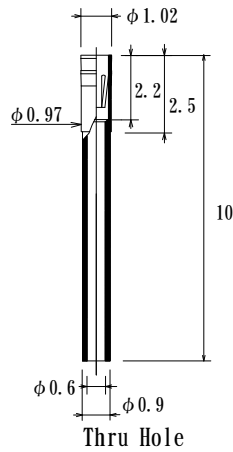


**NZP100-GG**

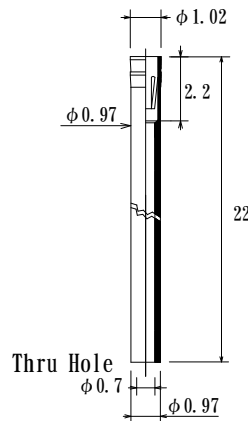

**NZP220-GG**




**NSP126-GG**

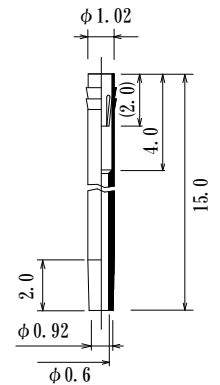


**NZP10-GG**

## NY Series Socket pins


Contact Resistance: less than 15mΩ  
 Acceptable Plug Range: φ 0.35~φ 0.42mm  
 Material Sleeve: Brass Gold over Ni plated, or Tin over Ni plated  
 Contact: Beryllium Copper, Gold over Ni plated



**NY42-GG**  
 Low Force



**NY42H0-GG**  
 Low Force



**NZM10-GG**  
 Low Force