


$\phi 0.50 \sim \phi 0.29\text{mm}$ plug, Socket Pins

Contact Resistance: less than $15\text{m}\Omega$ at 0.45mm plug

Acceptable Plug Range: $\phi 0.50 \sim \phi 0.29\text{mm}$

Material Sleeve: Brass Gold over Ni plated

Contact: Beryllium-Copper Gold over Ni plated
(NV8contact)

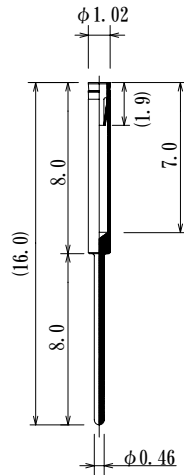

NV8316-GG