



$\phi 0.42 \sim \phi 0.21\text{mm}$ plug, Socket Pins

Contact Resistance: less than $15\text{m}\Omega$ at 0.40mm dia. plug
 Acceptable Plug Range: $\phi 0.42 \sim \phi 0.21\text{mm}$
 Material Sleeve: Brass Gold over Ni plated
 Contact: Beryllium-Copper Gold over Ni plated
 (NV7contact)

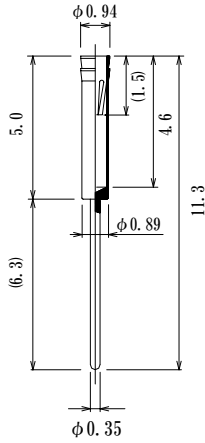

NV7115-GG

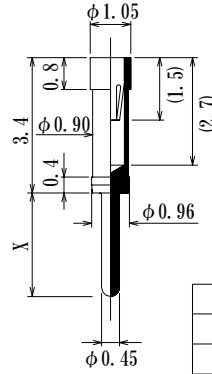

Patrs Number	X
NV7034-L026-GG	2.6
NV7034-L062-GG	6.2
NV7034-L039-GG	3.9

NV7034-Lxxx-GG

Note:

The Pins are reference only, not for sales.
 Special technique is required to handle these Ultra small Socket Pins.
 Our experienced engineers, to best suit your specifications, will design
 and assemble your connectors.