


SPRING PROBE, 8YS series

- [特徴] ・高耐久性
 ・高い接触信頼性
 ・狭ピッチ対応可
- ・High Durability
 ・High Contact Reliability
 ・Narrow Pitch type available



8YSN058 type

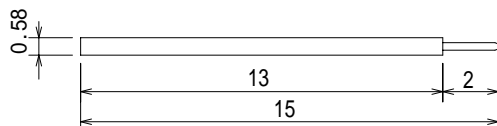


Preload ——— 0.15N(15gf)
 2 / 3 travel ——— 0.44N(45gf)
 Full travel ——— 0.64N(65gf)

<p>8YSN058-1</p>	<p>8YSN058-2</p>	<p>8YSN058-3</p>	<p>8YSN058-5F</p>
-------------------------	-------------------------	-------------------------	--------------------------

Acceptable Sockets

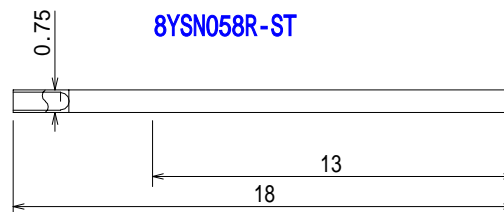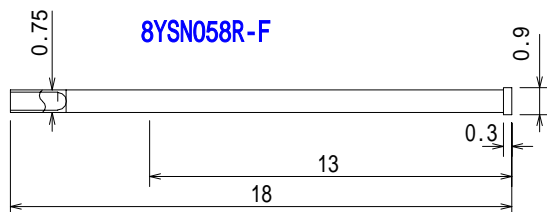



8YSF048 type

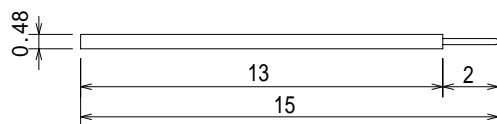


Preload ——— 0.20N(20gf)
 2 / 3 travel ——— 0.44N(45gf)
 Full travel ——— 0.59N(60gf)

<p>8YSF048-1</p>	<p>8YSF048-2</p>	<p>8YSF048-3</p>	<p>8YSF048-5F</p>
-------------------------	-------------------------	-------------------------	--------------------------

Acceptable Sockets

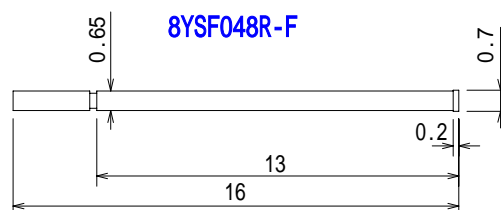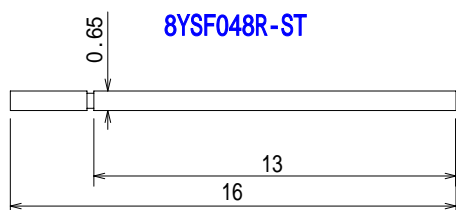



8YSJ038 type




Preload ——— 0.20N(20gf)
 2 / 3 travel — 0.44N(45gf)
 Full travel — 0.64N(65gf)

<p>8YSJ038-1</p>	<p>8YSJ038-2</p>	<p>8YSJ038-3</p>	<p>8YSJ038-5F</p>
-------------------------	-------------------------	-------------------------	--------------------------

Acceptable Sockets

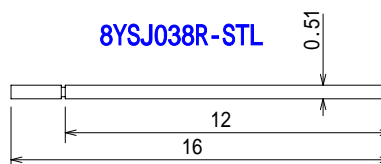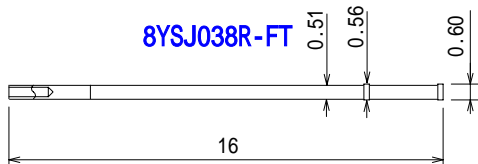




8YSB031 type

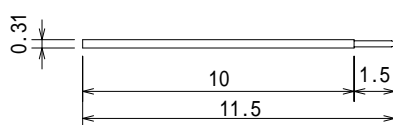


Preload ——— 0.15N(15gf)
 2 / 3 travel — 0.30N(30gf)
 Full travel — 0.45N(45gf)

<p>8YSB031-1</p>	<p>8YSB031-2</p>	<p>8YSB031-3</p>	<p>8YSB031-5F</p>
-------------------------	-------------------------	-------------------------	--------------------------

Acceptable Sockets

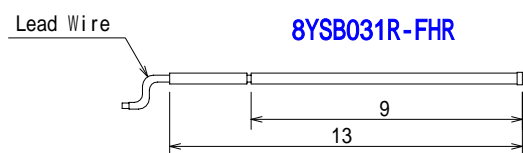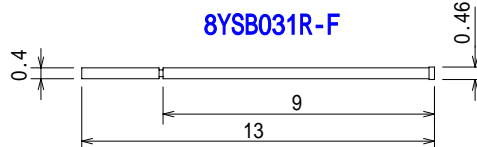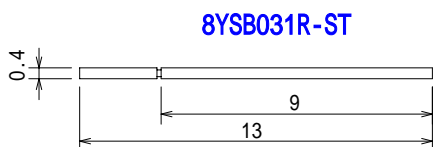

8YSQ025 type



Preload ——— 0.10N(10gf)
 2 / 3 travel — 0.20N(20gf)
 Full travel — 0.34N(35gf)

<p>8YSQ025-1</p>	<p>8YSQ025-2</p>	<p>8YSQ025-3</p>
-------------------------	-------------------------	-------------------------

Acceptable Sockets

