

Junction Terminal, Surface Mounting Type

- Suitable for connecting 2 PCBs
- Enable Mechanical strength with guid pins
- Attachable to pin sockets with high reliability
- Reflow enable

φ0.45pin { 1.27mmピッチ
2.54mmピッチ

Specifications

Withstand : AC700VRMS 1 minute
 Insulation : 500MΩ min
 Current Rating : 1.3A
 Operating Temperature : -65°C~+150°C (Au plating)

Materials

Plugpin : Copper Alloy Gold plating over Ni

Insulator : PPS, LCP equivalent
 Black UL94V-0

How to order


ISSSM - S XX - G 33 - T 030

ISSSM: 1.27mm pitch
 ISM : 2.54mm pitch

Insulator high
 T030: 3.0mm



P: Number of positions

Au plating over Ni





1.27mm pitch **ISSSM シリーズ**

1.27mm pitch **ISSSM-SXXD-G33-T030**

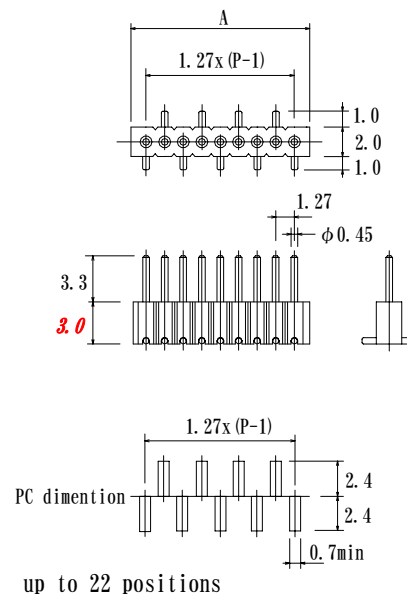
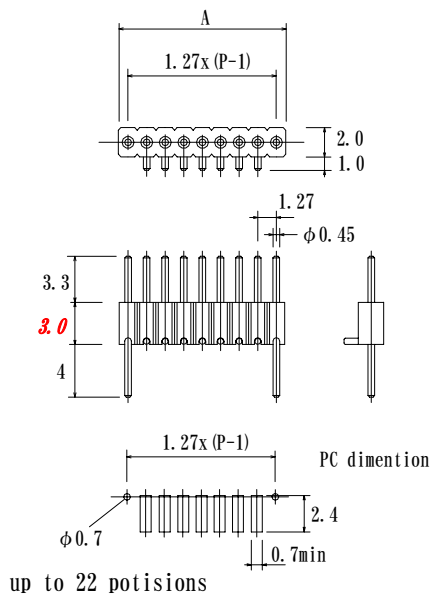


ex. mating with socket

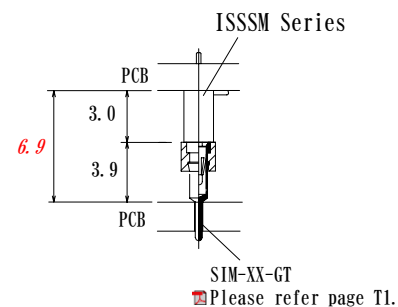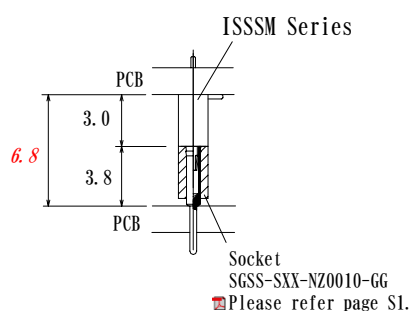


Junction Terminal, Surface Mounting Type

0.45pin } 1.27mm pitch
 φ0.45pin } 1.27mm pitch
 φ0.45pin } 2.54mm pitch
 φ0.45pin } 2.54mm pitch




2.54mm pitch **ISM Series**

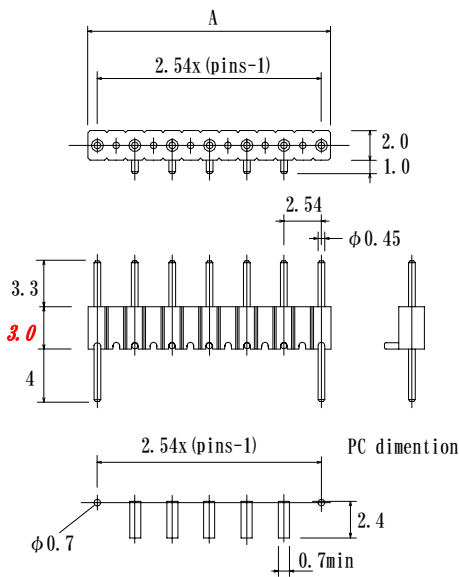


up to 11 positions

2.54mm pitch **ISM-SXXD-G33-T030**

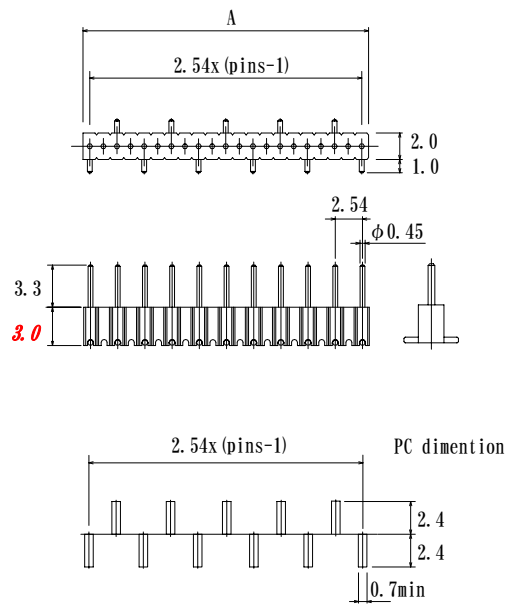

up to 11 positions

Nail Pin



0.45KXL3.8-MA