

USB3.0 Cable

•New standard USB3.0 connector is 10 times faster than USB2.0 (480Mbps).

•Applied equipment


PND, PDA, DSC, Game machine, MP3/MP4 Player, Digital Phone Frame, other mobile device

Specification

Current Rating 1.8A (#1 to #4 pin)
 0.25A (other pins)
 Contact Resistance 30mΩ max (VBUS&GND pin initial value)
 50mΩ max (other pin initial value)
 Insulation Resistance 100MΩ min @500VDC
 Operation Temperature -55°C to +85°C



Type A to Type B

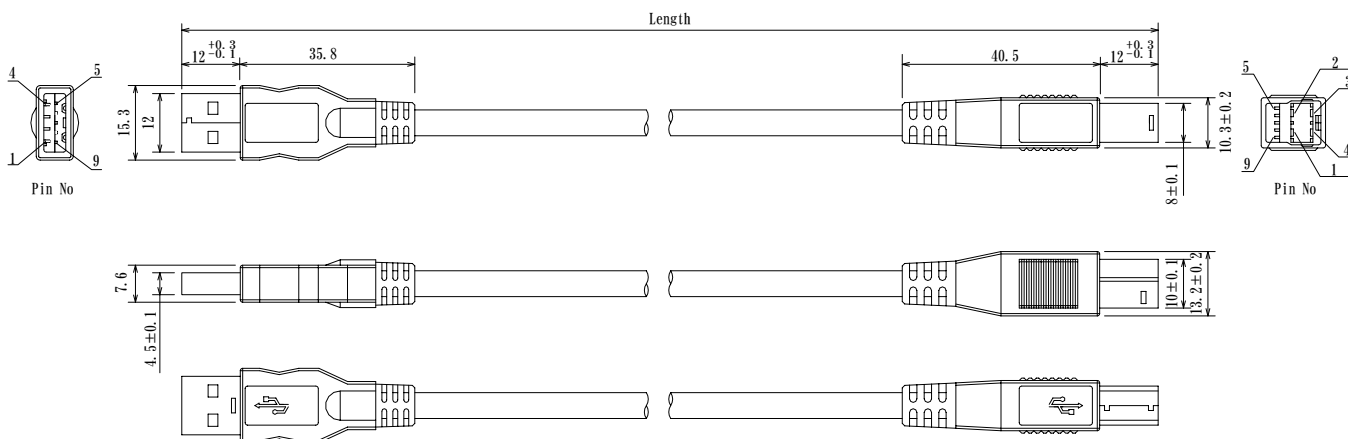

Part No.

USB30AB-09-CBL-LXXXX

Length L (mm)
1000 ⁺⁵⁰ / ₋₂₀
1500 ⁺⁷⁰ / ₋₃₀
2000 ⁺⁷⁰ / ₋₄₀

