
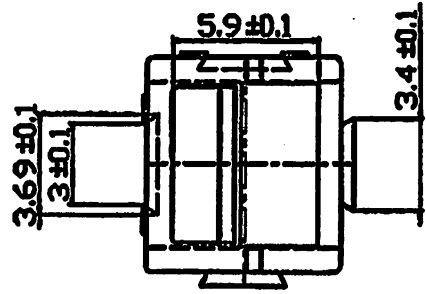


A | B | C | D | E | F | G | H

記號 | 變更內容 | 日期



CAT.NO.	COLOR
BMC1S-BLACK	BLACK
BMC1S-BLUE	BLUE
BMC1S-RED	RED
BMC1S-WHITE	WHITE
BMC1S-YELLOW	YELLOW

B圖
SCALE 4/1










CHART 1

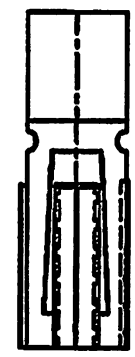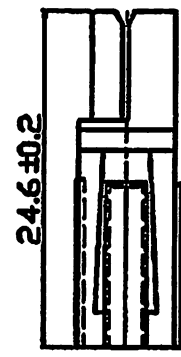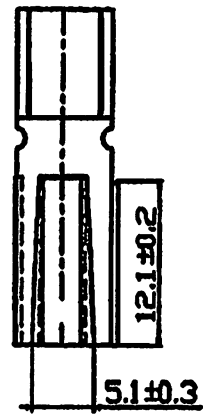

1
2
3
4
5
6

1
2
3
4
5
6

A | B | C | D | F | F | G | H

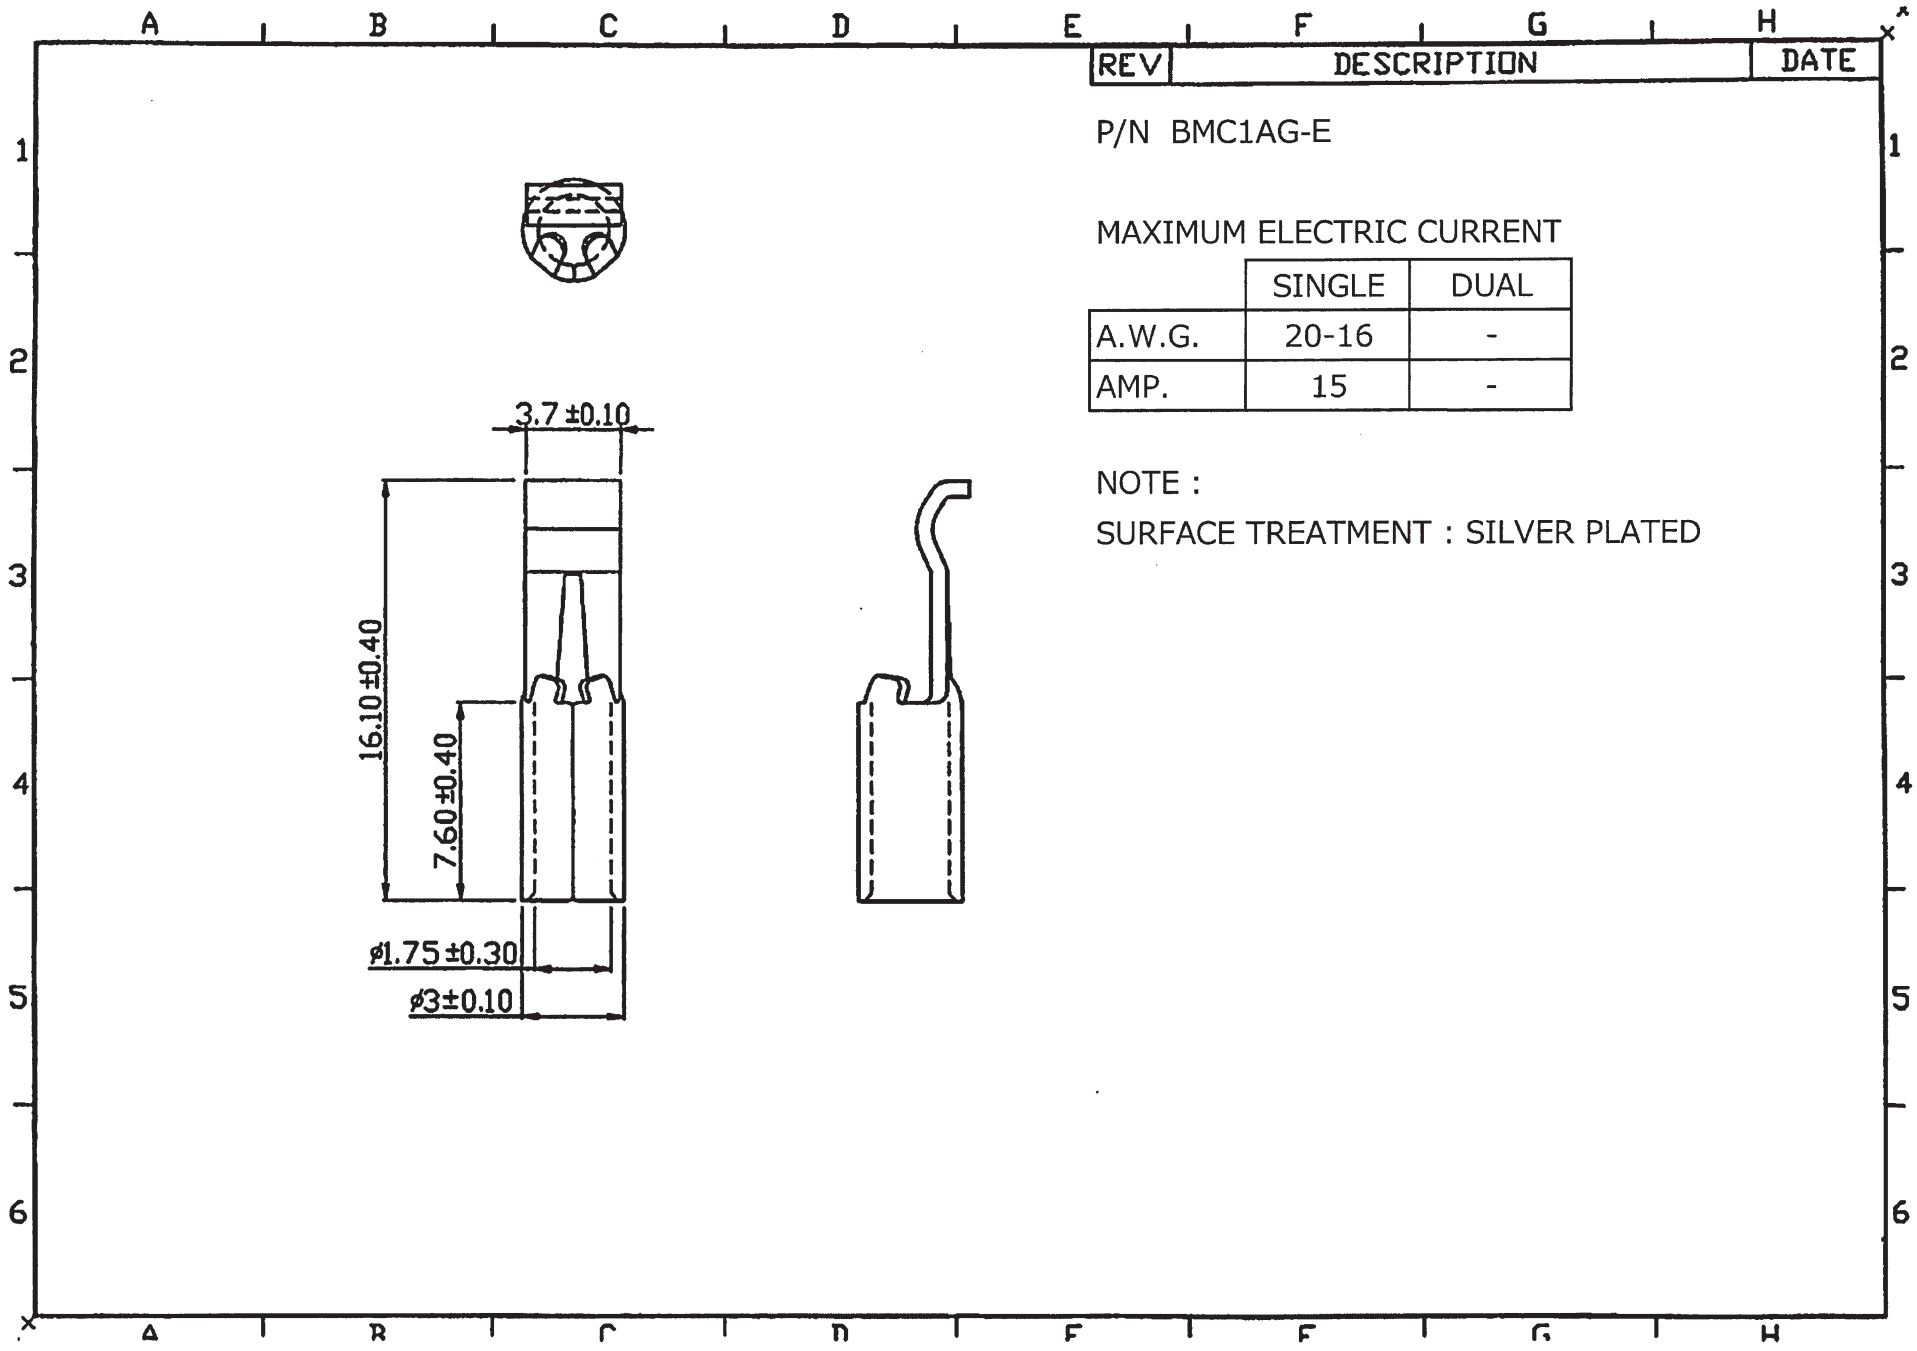

REV	DESCRIPTION	DATE
-----	-------------	------

P/N BMC1AG-E

MAXIMUM ELECTRIC CURRENT

	SINGLE	DUAL
A.W.G.	20-16	-
AMP.	15	-

NOTE :
SURFACE TREATMENT : SILVER PLATED