

## 2 Pole Connector

Voltage rating AC7.5KV


High cost effectiveness with injection-molded housing.

### Specification

Current rating: 1.5A  
Dielectric Strength: AC15KV 1 minute at sea level  
Insulation Resistance: DC1000V 100MΩ min  
Contact Resistance: 15mΩ max  
Temperature range: -10°C ~ +80°C

### Material

Insulator : PBT, glass filled, Black  
Plug pin : Brass, Gold plating over Ni Plating  
Socket pin : Beryllium Copper, Heat treated  
Gold Plating over Ni plating  
Sleeve: Brass, Gold Plating over Ni plating

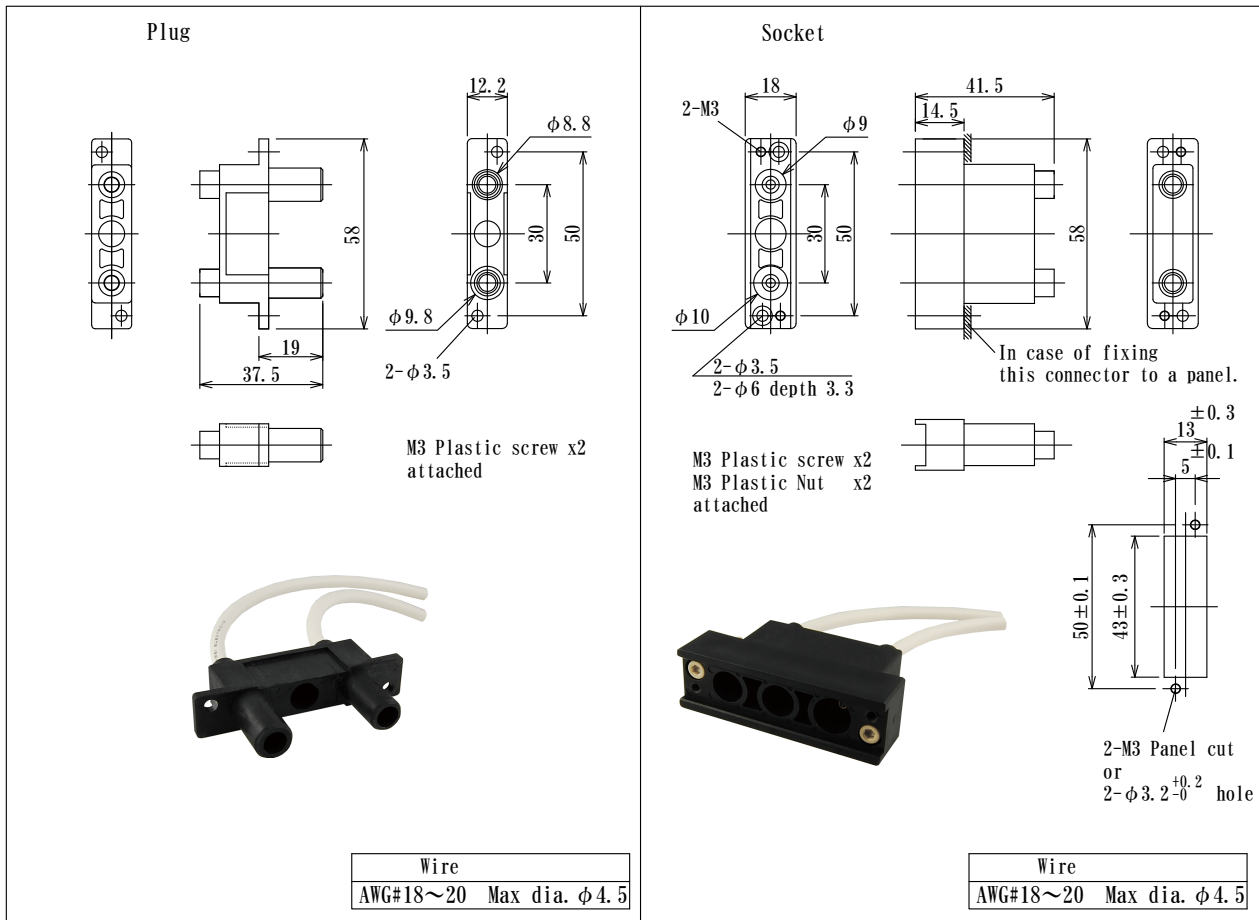

mm

### How to order

Please order as cable assemblies.

HAYC-S-2P-15 - □□□□

Length [mm]

Plug : HAYC-P-2P-15

Socket : HAYC-S-2P-15

### Figure of mating

