

High Voltage Connector

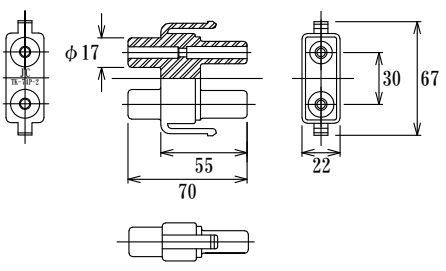
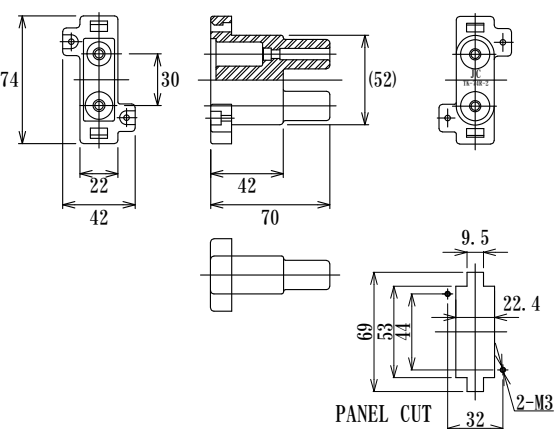


DC30KV

Specification

Current rating: 3A
Dielectric Strength: DC 30KV 1 min at sea level
Insulation Resistance: DC1000V 100MΩ min
Contact Resistance: 3mΩ max
Temperature range: -10°C~+80°C

Material

Insulator: High Temp. Thermoplastic
Plug pin: Brass, Phosphor bronze, Au plating over Ni
Socket pin
Louver: Copper Alloy
Au plating over Ni
Sleeve: Brass, Au plating over Ni

<p>Plug Insulator</p> <p>M-TK-74P-2</p> 	<p>Socket Insulator</p> <p>M-TK-74R-2</p> 												
<p>Plug Pin</p>  <p>Crimping</p> <table border="1" data-bbox="231 1164 678 1243"> <thead> <tr> <th>Part number</th> <th>Wire</th> </tr> </thead> <tbody> <tr> <td>UJCP-F30CRMP (20) -TK</td> <td>AWG#20~#22</td> </tr> <tr> <td>UJCP-F30CRMP (16) -TK</td> <td>AWG#16~#20</td> </tr> </tbody> </table>	Part number	Wire	UJCP-F30CRMP (20) -TK	AWG#20~#22	UJCP-F30CRMP (16) -TK	AWG#16~#20	<p>Socket Pin</p>  <p>Crimping</p> <table border="1" data-bbox="885 1164 1332 1243"> <thead> <tr> <th>Part number</th> <th>Wire</th> </tr> </thead> <tbody> <tr> <td>UJCS-F30CRMP (20) -TK</td> <td>AWG#20~#22</td> </tr> <tr> <td>UJCS-F30CRMP (16) -TK</td> <td>AWG#16~#20</td> </tr> </tbody> </table>	Part number	Wire	UJCS-F30CRMP (20) -TK	AWG#20~#22	UJCS-F30CRMP (16) -TK	AWG#16~#20
Part number	Wire												
UJCP-F30CRMP (20) -TK	AWG#20~#22												
UJCP-F30CRMP (16) -TK	AWG#16~#20												
Part number	Wire												
UJCS-F30CRMP (20) -TK	AWG#20~#22												
UJCS-F30CRMP (16) -TK	AWG#16~#20												

- Crimping Tool is needed.
- After assemble, both pins(socket and plug) are able to be removed with the pin removal tool.
- Please contact us about the tools.

How to order (example)

M-TK-74P-2	50pcs
UJCP-F30CRMP (16) -TK	100pcs
M-TK-74R-2	50pcs
UJCS-F30CRMP (16) -TK	100pcs

