

3 Pole Connector


AC5KV

Specification

Current rating : 1.5A
Dielectric Strength : AC10kV 1 minute at sea level
Insulation Resistance : DC1000V 100000MΩ min
Contact Resistance : 15mΩ max
Temperature range : -10°C~+80°C

Material

Insulator : Unilate, glass filled, Black
Plug pin : Brass, Gold plating over Ni Plating
Contact : Beryllium Copper, Heat treated
Gold Plated over Ni plating
Sleeve, Brass, Gold Plating over Ni plating

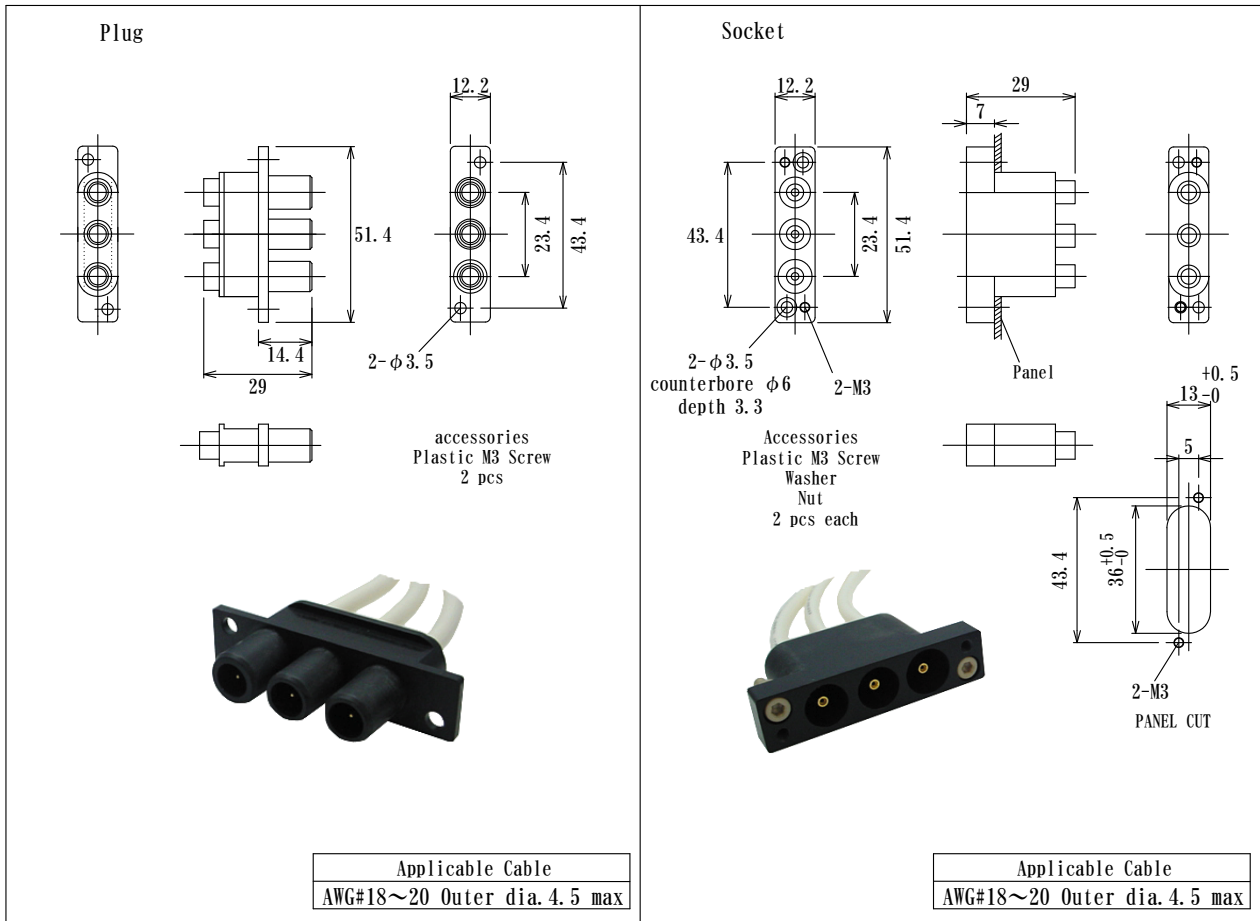

mm

How to order


HAY-P-3P-10 - □□□□

Connector P/N

Plug : HAY-P-3P-10
Socket : HAY-S-3P-10

Length mm

Length mm

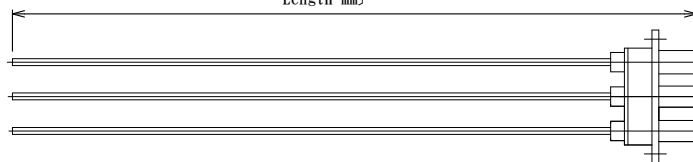

Recommended Cable P/N : **CABLE-3239B**

Size	DWV	temp.	Insulator	Outer dia.	Insulator color, material
AWG20	DC30KV	150°Cmax	1.75mm	4.3mm	White, Silicon

