

3 Pole Connector

AC5KV

* machined housing

* Please contact us if you need customization in terms.

Specification

Current rating: 1.5A
Dielectric Strength: AC10kV 1 minute at sea level
Insulation Resistance: DC1000V 100MΩ min
Contact Resistance: 15mΩ max
Temperature range: -10°C~+80°C

Material

Insulator : Unilate, glass filled, Black
Plug pin : Brass, Gold plating over Ni Plating
Socket pin : Brass, Gold plating over Ni Plating
Contact: Beryllium Copper, Heat treated
Gold Plating over Ni plating
Sleeve: Brass, Gold Plating over Ni plating

Plug	Socket
<p>Applicable Cable AWG#18~20 Outer dia. 4.5 max</p>	<p>Applicable Cable AWG#18~20 Outer dia. 4.5 max</p>

How to order


Please order as cable assemblies.

HAY-P-3P-10 - □□□□

length mm

Connector P/N

Plug : HAY-P-3P-10
Socket : HAY-S-3P-10

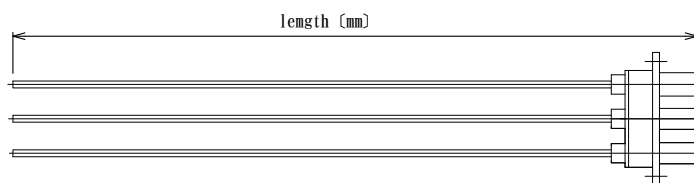

Size	Dielectric voltage	Temperature	Insulant Thickness	Outer Diameter	Insulant Color, Material
AWG20	DC30KV	150°Cmax	1.75mm	4.3mm	White, Silicone