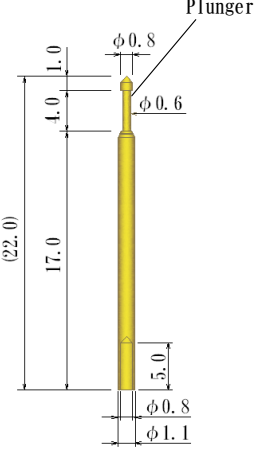
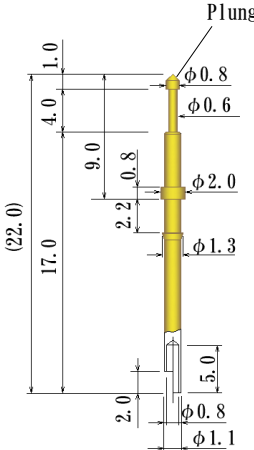
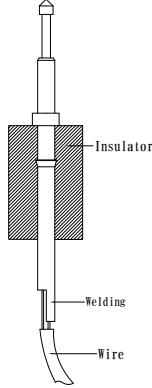
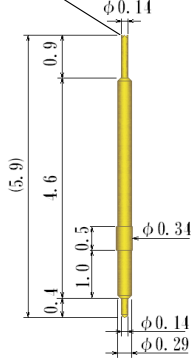
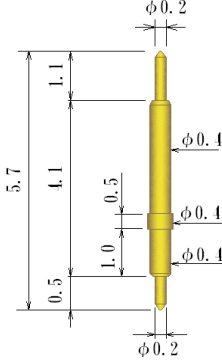


High Temperature pin type

200°C MAX
300°C MAX

<p>High Temperature spec -40°C ~ +300°C</p>  <p>Plunger</p> <p>Single ended probe pin</p> <p>Full travel 3.5mm 0.37N (38gf) at 2.3mm travel</p> <p>8YF110L220-EP</p>	<p>High Temperature spec -40°C ~ +300°C</p>  <p>Plunger</p> <p>Single ended probe pin</p> <p>Full travel 3.5mm 0.37N (38gf) at 2.3mm travel</p> <p>8YF110L220-SU</p>  <p>How to use</p> <p>Insulator</p> <p>Welding</p> <p>Wire</p>
<p>High Temperature spec -40°C ~ +200°C</p> <p>4 point crown type</p>  <p>Double ended probe pin</p> <p>Full travel 0.8mm 0.245N (25gf) at 0.7mm travel</p> <p>8YK-D29H-L59-PT90-HIJ</p> <p>Non magnetic type</p>	<p>High Temperature spec -40°C ~ +200°C</p>  <p>Double ended probe pin</p> <p>Full travel 0.8mm 0.275N (28gf) at 0.55mm travel Full travel 0.7mm Current rating 0.5A</p> <p>8YK-D40H-L57-CNHIJ (88YK-D40H-L57-CNHIJ)</p> <p>Non magnetic type</p>