





J Fastener/Press Fit Nut

- By press-fitting into PCB (epoxy glass, bake, etc.), the nut could be obtained with high rotational fixing force.
- Small size.



How to Use
Able to tightened and fixed

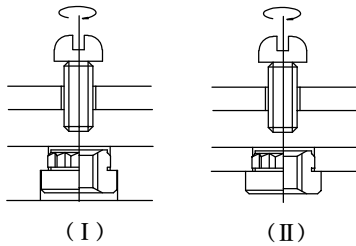

P/N	Material	φA	φB	T	M Screw Thread	φa ±0.02	φb ±0.03
BFP-M1.2-1.5	Phosphor Bronze	3.0	3.5	1.0	M1.2x0.25P	2.75	3.6
BFB-M2-1.5-S	Brass	3.5	4.5	1.5	M2x0.4P	Inquiry	4.6
BFS-M2-1.5	SUS	3.0	4.0	1.5	M2.x0.4P	2.75	4.1
BFS-M2.6-1.5				1.5	M2.6x0.45P	4.2	5.6
BFS-M3-1.65				1.65	M3x0.5P		
BFS-M3-3.0				3.0			
BFS-M3-10.0				10.0			
BFS-M4-4.0			6.68	8.5	4.0	M4x0.7P	6.4